




HeritageTM
INDUSTRIAL

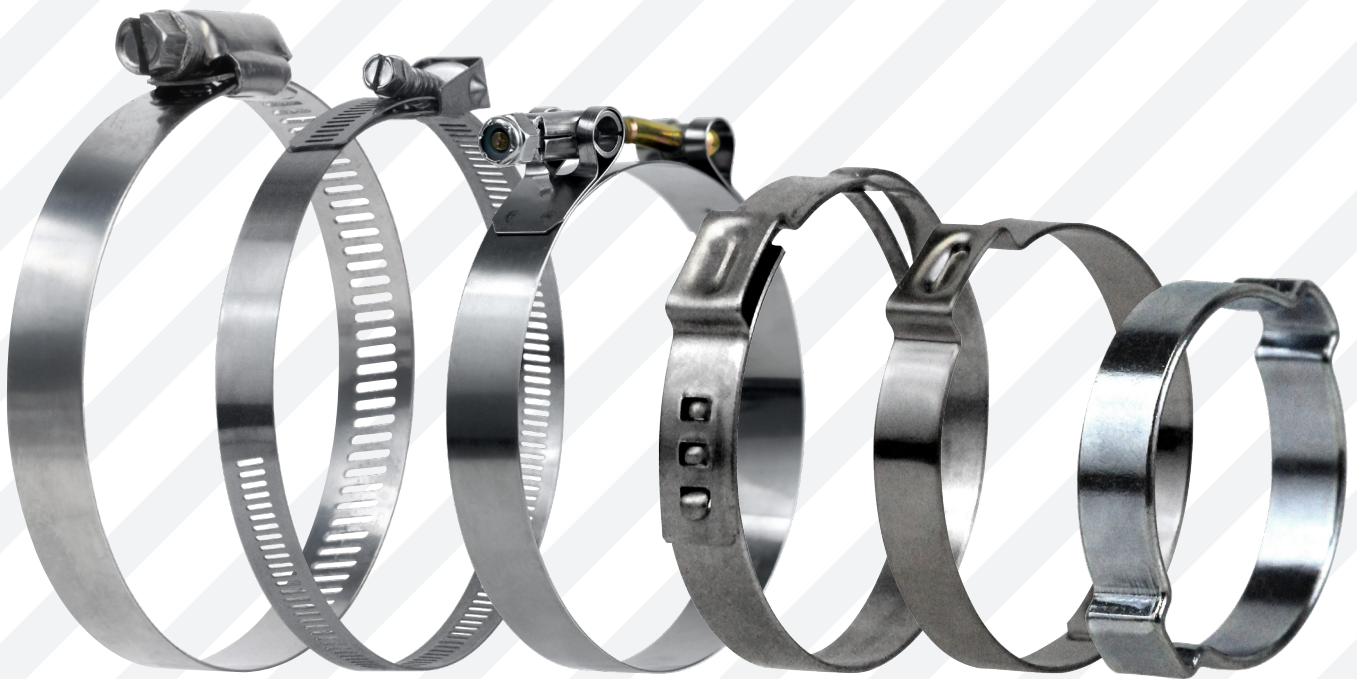

WORM GEAR • QUICK RELEASE • T-BOLT • EAR CLAMPS

HOSE CLAMPS

Quality without Compromise

Heritage Industrial

1/2" Worm Gear Hose Clamps

	PREMIUM					STANDARD				VALUE			
SAE SIZE				Ideal-Tridon Series 67-4	Norma / Breeze Series 63000				Norma / Breeze Series 62000*				Ideal-Tridon Series 57-0
006				67004-0006	63006H				62006H				57060
008				67004-0008	63008H				62008H				57080
010				67004-0010	63010H				62010H				57100
012				67004-0012	63012H				62012H				57120
016				67004-0016	63016H				62016H				57160
020				67004-0020	63020H				62020H				57200
024				67004-0024	63024H				62024H				57240
028				67004-0028	63028H				62028H				57280
032				67004-0032	63032H				62032H				57320
036				67004-0036	63036H				62036H				57360
040				67004-0040	63040H				62040H				57400
044				67004-0044	63044H				62044H				57440
048				67004-0048	63048H				62048H				57480
052				67004-0052	63052H				62052H				57520
056				67004-0056	63056H				62056H				57560
060				67004-0060	63060H				62060H				57600
064				67004-0064	63064H				62064H				57640
072				67004-0072	63072H				62072H				57720
080				67004-0080	63080H				62080H				57800
088				67004-0088	63088H				62088H				57880
096				—	—				62096H				57960
104				67004-0104	63104H				62104H				57104
128				—	—				—				—


* Not an exact match. Standard Heritage Industrial clamps feature a 400 Series Stainless Steel band.

9/16" Heavy Duty Hose Clamps


SAE SIZE	PREMIUM				Norma / Breeze Series 600
				Ideal-Tridon Series 63-4	
006				63004-0006	—
008				63004-0008	—
010				63004-0010	600-10H
012				63004-0012	600-12H
016				63004-0016	600-16H
020				63004-0020	600-20H
024				63004-0024	600-24H
028				63004-0028	600-28H
032				63004-0032	600-32HB
036				63004-0036	600-36H
040				63004-0040	600-40H
044				63004-0044	600-44H
048				63004-0048	600-48H
052				63004-0052	600-52H
056				63004-0056	600-56H
060				63004-0060	600-60H
064				63004-0064	600-64H
072				63004-0072	600-72HB
080				63004-0080	600-80H
088				63004-0088	600-88H
096				63004-0096	600-96HB
104				63004-0104	600-104HB
116				63004-0116	600-116H
128				63004-0128	600-128H
140				63004-0140	600-140H
152				63004-0152	600-152H
164				63004-0164	600-164H
176				63004-0176	600-176H
188				63004-0188	600-188H

5/16" Mini Hose Clamps

SAE SIZE	PREMIUM				Norma / Breeze Series 3700
				Ideal-Tridon Series 62M	
004				62604	3704
005				62M05	—
006				62606	3706
008				62M08	3708
010				62M10	3710
012				62M12	3712
016				62M16	3716
020				62M20	3720
024				62M24	3724
028				62M28	3728
032				62M32	3732
036				62M36	—

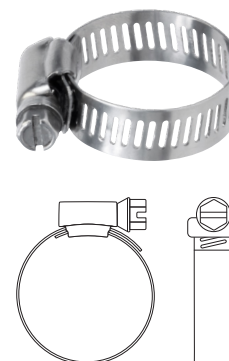

Also Available from Heritage Industrial:



Visit huyett.com/catalogs to download your copy today.



9/16" Quick Release Hose Clamps


SAE SIZE	PREMIUM**			VALUE†			Min (Inch)	Max (Inch)
056			HCQR-442-056-5625			HCQR-P22-056-5625	1"	4"
072			HCQR-442-072-5625			HCQR-P22-072-5625	2"	5"
088			HCQR-442-088-5625			HCQR-P22-088-5625	2"	6"
104			HCQR-442-104-5625			HCQR-P22-104-5625	1-3/4"	7"
116			HCQR-442-116-5625			HCQR-P22-116-5625	1-3/4"	7-3/4"
128			HCQR-442-128-5625			HCQR-P22-128-5625	2-1/4"	8-1/2"
136			—			HCQR-P22-136-5625	1-3/4"	9"
152			HCQR-442-152-5625			HCQR-P22-152-5625	2"	10"
188			HCQR-442-188-5625			HCQR-P22-188-5625	2"	12-1/4"
224			HCQR-442-224-5625			—	2"	14-1/4"
232			—			HCQR-P22-232-5625	1-11/16"	15"
258			—			HCQR-P22-258-5625	1-13/16"	16-1/4"
272			—			HCQR-P22-272-5625	2"	17"
288			—			HCQR-P22-288-5625	1-13/16"	18-1/2"
332			HCQR-442-332-5625			HCQR-P22-332-5625	2"	21-1/4"

** Compare to Ideal-Tridon Snaplock Series 58-0. † Compare to Ideal-Tridon Snaplock Series 56-0.


3/4" T-Bolt Hose Clamps†

SAE SIZE						Min (mm)	Max (mm)	Min (Inch)	Max (Inch)
—						35.1 mm	39.9 mm	1.38"	1.57"
—						38.1 mm	42.9 mm	1.50"	1.69"
—						41.3 mm	47.8 mm	1.63"	1.88"
028						44.5 mm	50.8 mm	1.75"	2.00"
032						47.6 mm	55.6 mm	1.88"	2.19"
036						50.8 mm	58.7 mm	2.00"	2.31"
040						54.1 mm	62 mm	2.13"	2.44"
044						57.2 mm	65 mm	2.25"	2.56"
048						60.3 mm	68.3 mm	2.38"	2.69"
052						63.5 mm	71.4 mm	2.50"	2.81"
056						66.7 mm	74.7 mm	2.63"	2.94"
060						69.9 mm	77.7 mm	2.75"	3.06"
064						73 mm	81 mm	2.88"	3.19"
068						76.2 mm	84.1 mm	3.00"	3.31"
072						79.4 mm	87.4 mm	3.13"	3.44"
076						82.6 mm	90.4 mm	3.25"	3.56"
080						85.7 mm	93.7 mm	3.38"	3.69"
084						88.9 mm	96.8 mm	3.50"	3.81"
088						92.1 mm	100.1 mm	3.63"	3.94"
092						95.3 mm	103.1 mm	3.75"	4.06"
100						101.6 mm	109.5 mm	4.00"	4.31"
108						108 mm	115.8 mm	4.25"	4.56"
116						114.3 mm	122.2 mm	4.50"	4.81"
124						120.7 mm	128.5 mm	4.75"	5.06"
132						127 mm	134.9 mm	5.00"	5.31"
140						133.4 mm	141.2 mm	5.25"	5.56"
148						139.7 mm	147.6 mm	5.50"	5.81"
156						146.1 mm	153.9 mm	5.75"	6.06"
164						152.4 mm	160.3 mm	6.00"	6.31"
172						158.8 mm	166.6 mm	6.25"	6.56"
180						165.1 mm	173 mm	6.50"	6.81"
188						171.5 mm	179.3 mm	6.75"	7.06"
196						177.8 mm	185.7 mm	7.00"	7.31"
204						184.2 mm	192 mm	7.25"	7.56"
212						190.5 mm	198.4 mm	7.50"	7.81"
220						196.9 mm	204.7 mm	7.75"	8.06"
228						203.2 mm	211.1 mm	8.00"	8.31"
236						209.6 mm	217.4 mm	8.25"	8.56"
244						215.9 mm	223.8 mm	8.50"	8.81"

† Compare to Ideal-Tridon Series 30050 or Norma / Breeze Type "TB" Hose Clamps.

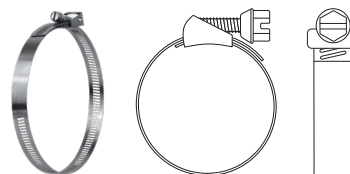

- Quick release clamps feature a swivel-lock screw toggle latch for quick installation and removal
- Screw end is securely affixed so it won't fall out or back out on its own when open
- Reusable and ideal for applications that require frequent inspection or adjustment

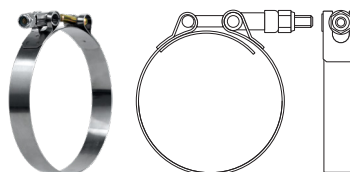

- T-bolt clamps, or "Racing Clamps," provide even, 360° sealing pressure around hose and fitting assemblies to prevent leaks and blow-outs
- Ideal for use in a wide range of applications including high-vibration environments and in hard-to-reach places
- Wide band provides greater clamping force
- Smooth bands eliminate the chance of tearing or cutting pliable hoses
- Well-suited for discharge and suction hoses or with silicone hoses and firm plastic and rubber hose and tube
- Reusable and easy to remove
- Do not over tighten

Always assemble a sample of your hose and pipe or fitting before measuring and selecting T-Bolt clamps as they have a limited usable range. The right size of clamp is critical to ensuring a leak proof seal.

Need Certs?


Visit huyett.com for dimensions, specifications, tolerances, country of origin, and **FREE** Certificates of Compliance**.




** Some Exclusions Apply

Stepless 1-Ear Stainless Steel

Band Width	Part Number	Min (mm)	Max (mm)	Min (Inch)	Max (Inch)	Oetiker Series 167
5 mm	HCS1E-0070-5-SS	5.8 mm	7 mm	0.228"	0.276"	16700001
	HCS1E-0087-5-SS	7 mm	8.7 mm	0.276"	0.343"	16700003
	HCS1E-0095-5-SS	7.8 mm	9.5 mm	0.307"	0.374"	16700004
	HCS1E-0100-5-SS	8.3 mm	10 mm	0.327"	0.394"	16700005
	HCS1E-0105-5-SS	8.8 mm	10.5 mm	0.346"	0.413"	16700006
	HCS1E-0109-5-SS	9.2 mm	10.9 mm	0.362"	0.429"	16702492
	HCS1E-0113-5-SS	9.6 mm	11.3 mm	0.378"	0.445"	16700007
	HCS1E-0118-5-SS	10.1 mm	11.8 mm	0.398"	0.465"	16700008
7 mm	HCS1E-0123-7-SS	9.8 mm	12.3 mm	0.386"	0.484"	16700009
	HCS1E-0128-7-SS	10.3 mm	12.8 mm	0.406"	0.504"	16702493
	HCS1E-0133-7-SS	10.8 mm	13.3 mm	0.425"	0.524"	16700010
	HCS1E-0138-7-SS	11.3 mm	13.8 mm	0.445"	0.543"	16700011
	HCS1E-0140-7-SS	11.5 mm	14 mm	0.453"	0.551"	16700012
	HCS1E-0145-7-SS	12 mm	14.5 mm	0.472"	0.571"	16700013
	HCS1E-0153-7-SS	12.8 mm	15.3 mm	0.504"	0.602"	16700015
	HCS1E-0157-7-SS	13.2 mm	15.7 mm	0.520"	0.618"	16700016
	HCS1E-0170-7-SS	14.5 mm	17 mm	0.571"	0.669"	16700017
	HCS1E-0188-7-SS	16.6 mm	19.8 mm	0.654"	0.780"	16702498
	HCS1E-0210-7-SS	17.8 mm	21 mm	0.701"	0.827"	16700024
	HCS1E-0226-7-SS	19.4 mm	22.6 mm	0.764"	0.890"	16700026
	HCS1E-0271-7-SS	23.9 mm	27.1 mm	0.941"	1.067"	—
	HCS1E-0286-7-SS	25.4 mm	28.6 mm	1.000"	1.126"	16700035
	HCS1E-0301-7-SS	26.9 mm	30.1 mm	1.059"	1.185"	—
	HCS1E-0316-7-SS	28.4 mm	31.6 mm	1.118"	1.244"	16700040
	HCS1E-0346-7-SS	31.4 mm	34.6 mm	1.236"	1.362"	—
	HCS1E-0381-7-SS	34.9 mm	38.1 mm	1.374"	1.500"	—
	HCS1E-0410-7-SS	37.8 mm	41 mm	1.488"	1.614"	—
	HCS1E-0425-7-SS	39.3 mm	42.5 mm	1.547"	1.673"	—
	HCS1E-0455-7-SS	42.3 mm	45.5 mm	1.665"	1.791"	—
	HCS1E-0485-7-SS	45.3 mm	48.5 mm	1.784"	1.909"	—
	HCS1E-0515-7-SS	48.3 mm	51.5 mm	1.902"	2.028"	—
	HCS1E-0545-7-SS	51.3 mm	54.5 mm	2.020"	2.146"	—
	HCS1E-0575-7-SS	54.3 mm	57.5 mm	2.138"	2.264"	—
	HCS1E-0635-7-SS	60.3 mm	63.5 mm	2.374"	2.500"	—
	HCS1E-0680-7-SS	64.8 mm	68 mm	2.551"	2.667"	16700071
	HCS1E-0770-7-SS	73.8 mm	77 mm	2.906"	3.032"	—

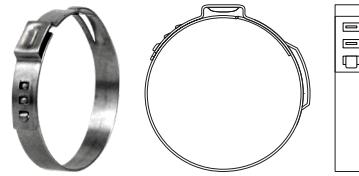

Stepless 1-Ear clamps are permanent, one-time use, tamper-proof clamps that provide a 360° seal with no internal steps or gaps. They install easily and work best with firm plastic or sturdy rubber hose or tube.

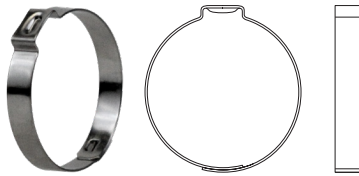

Low-profile, permanent 1-Ear clamps install easily in tight-spots and compensate for component tolerances while providing a tamper-proof seal for firm plastic or sturdy rubber hoses and tubes.



2-Ear clamps can be used on a greater variety of hose diameters and are well-suited for one time use with pliable tubing and hoses – even in thermal or vibratory applications.

1-Ear Stainless Steel

Part Number	Min (mm)	Max (mm)	Min (Inch)	Ma (Inch)	Oetiker Series 153
HC1E-0100-SS	8.5 mm	10 mm	0.335"	0.394"	15300013
HC1E-0105-SS	9.1 mm	10.5 mm	0.358"	0.413"	15300014
HC1E-0113-SS	9.6 mm	11.3 mm	0.378"	0.445"	15300016
HC1E-0123-SS	10.3 mm	12.3 mm	0.406"	0.484"	15300019
HC1E-0128-SS	10.8 mm	12.8 mm	0.425"	0.504"	15300020
HC1E-0133-SS	11.3 mm	13.3 mm	0.445"	0.524"	15300021
HC1E-0145-SS	12.5 mm	14.5 mm	0.492"	0.571"	15300024
HC1E-0155-SS	13.5 mm	15.5 mm	0.532"	0.61"	15300026
HC1E-0175-SS	15.3 mm	17.5 mm	0.602"	0.689"	15300030
HC1E-0185-SS	16.3 mm	18.5 mm	0.642"	0.728"	15300031
HC1E-0195-SS	17.2 mm	19.5 mm	0.677"	0.768"	15300032
HC1E-0207-SS	17.9 mm	20.7 mm	0.705"	0.815"	15300034
HC1E-0225-SS	19.9 mm	22.5 mm	0.783"	0.886"	15300037
HC1E-0255-SS	22.7 mm	25.5 mm	0.894"	1.004"	15300041
HC1E-0270-SS	24.1 mm	27 mm	0.949"	1.063"	15300044
HC1E-0286-SS	25.5 mm	28.6 mm	1.004"	1.126"	—
HC1E-0301-SS	27 mm	30.1 mm	1.063"	1.185"	—
HC1E-0316-SS	28.5 mm	31.6 mm	1.122"	1.244"	—
HC1E-0346-SS	31.5 mm	34.6 mm	1.24"	1.362"	—
HC1E-0381-SS	35 mm	38.1 mm	1.378"	1.5"	—

2-Ear Carbon Steel with Zinc Clear Finish

Part Number	Min (mm)	Max (mm)	Min (Inch)	Max (Inch)	Oetiker Series 101
HC2E-0041-ZC	3.1 mm	4.1 mm	0.122"	0.161"	10100000
HC2E-0045-ZC	3.5 mm	4.5 mm	0.138"	0.177"	10100001
HC2E-0050-ZC	3.4 mm	5 mm	0.134"	0.197"	10100002
HC2E-0070-ZC	5 mm	7 mm	0.197"	0.276"	10100004
HC2E-0090-ZC	7 mm	9 mm	0.276"	0.354"	10100008
HC2E-0110-ZC	8.1 mm	11 mm	0.319"	0.433"	10100011
HC2E-0130-ZC	10.8 mm	13 mm	0.425"	0.512"	10100016
HC2E-0150-ZC	12.5 mm	15 mm	0.492"	0.591"	10100019
HC2E-0170-ZC	14 mm	17 mm	0.551"	0.669"	10100022
HC2E-0180-ZC	15 mm	18 mm	0.591"	0.709"	10100024
HC2E-0200-ZC	16.2 mm	20 mm	0.638"	0.787"	10100027
HC2E-0220-ZC	18 mm	22 mm	0.709"	0.866"	10100029
HC2E-0230-ZC	19 mm	23 mm	0.748"	0.906"	10100030
HC2E-0250-ZC	21 mm	25 mm	0.827"	0.984"	10100032
HC2E-0270-ZC	22.5 mm	27 mm	0.886"	1.063"	10100034
HC2E-0280-ZC	24 mm	28 mm	0.945"	1.102"	10100035
HC2E-0310-ZC	26.3 mm	31 mm	1.035"	1.22"	10100037
HC2E-0340-ZC	29.3 mm	34 mm	1.154"	1.339"	10100041
HC2E-0370-ZC	32 mm	37 mm	1.26"	1.457"	10100043
HC2E-0400-ZC	35 mm	40 mm	1.378"	1.575"	10100045
HC2E-0430-ZC	37.6 mm	43 mm	1.48"	1.693"	10100047
HC2E-0460-ZC	40.6 mm	46 mm	1.598"	1.811"	10100049

Visit huyett.com for Hose Clamp Installation Tools and Assortments.