




YOUR POWER TRANSMISSION MASTER DISTRIBUTOR

BROAD
SELECTION

HIGH
QUALITY

COMPETITIVE
PRICES

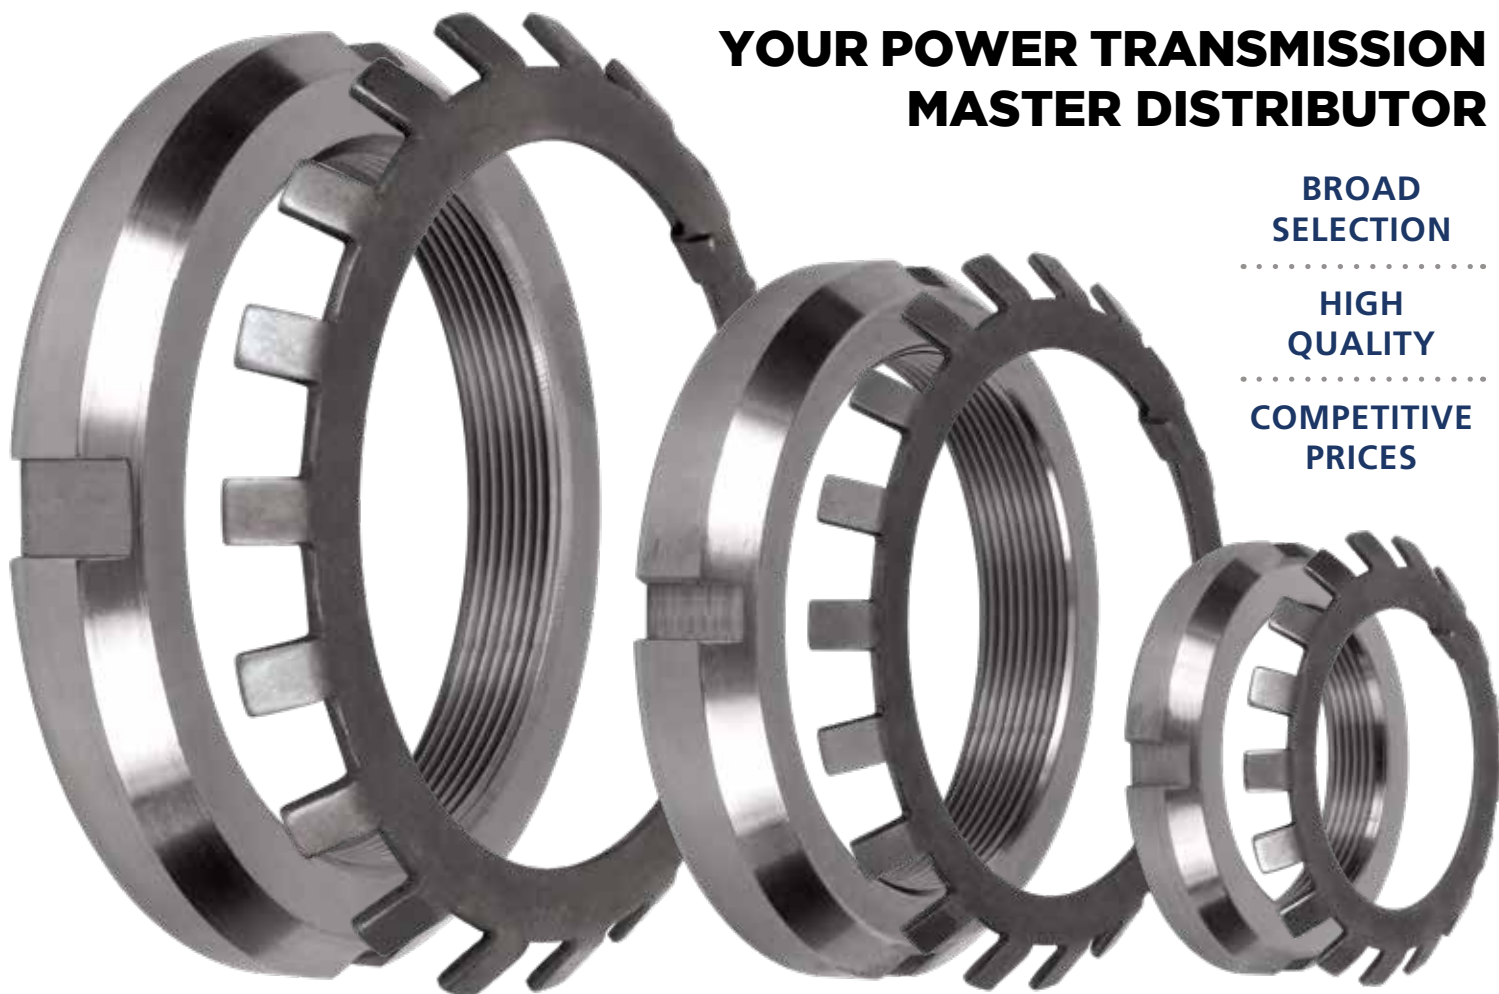

BEARING LOCK NUTS & LOCK WASHERS

CARBON STEEL • STAINLESS STEEL

INCH & METRIC

- Standard
- Heavy Duty
- Thin Section
- Fine Threads
- Left-Handed Threads

STANDARDS COMPLIANT

- ANSI/ABMA 8.2
- SAE ABEC/SAE AFBMA
- ISO-2982

VISIT HUYETT.COM FOR LOW MINIMUMS, GREAT PRICES, & EASY ORDERING!



BEARING LOCK NUTS • INCH

CARBON STEEL • PLAIN

N/AN	SAE ABEC / SAE AFBMA.....	3
NH	Heavy Duty.....	3
NI	Fine Threads.....	3
NL	Left-Handed Threads.....	4

303 STAINLESS STEEL • PLAIN

NS	Corrosion Resistant.....	4
----	--------------------------	---

LOCK WASHERS • INCH

CARBON STEEL • PLAIN

W	SAE ABEC / SAE AFBMA.....	5
WH	Heavy Duty.....	5
WI	Fine Threads.....	6
WT	Thin Section.....	6

302/304 STAINLESS STEEL • PLAIN

WS	Passivated.....	6
----	-----------------	---

BEARING LOCK NUTS • METRIC


CARBON STEEL • PLAIN

KM	ISO-2982.....	7
----	---------------	---

LOCK WASHERS • METRIC

CARBON STEEL • PLAIN

MB	ISO-2982.....	7
----	---------------	---

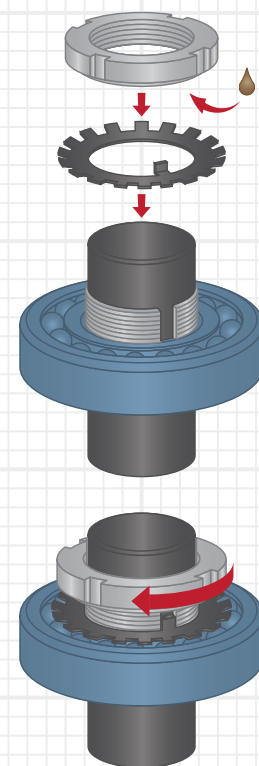

To secure gears, belt pulleys, bearings, or other machine components onto shafts, bearing lock nuts and lock washers are installed against the face of the bearing and tightened with a spanner wrench. Use of lubrication is recommended to prevent galling.

OTHER TYPES AND STYLES AVAILABLE • CALL FOR DETAILS!



**LIGHTWEIGHT
HARDENED ALLOY STEEL
HIGH-PRECISION**



**HIGH-PRECISION • SELF-LOCKING
AEROSPACE • MS172236-MS172270
MILITARY GRADE • MS19068**





BEARING LOCK NUTS • INCH

SAE ABEC / SAE AFBMA

Carbon Steel • Plain

Part No.	Cross Reference†	Thread Size & Pitch	O.D.	Thickness Min/Max	Mating Lock Washer
N-00	—	.391"-32	.750"	.209"/.229"	W-00
N-01	—	.469"-32	.875"	.303"/.323"	W-01
N-02	—	.586"-32	1.000"	.303"/.323"	W-02
N-03	—	.664"-32	1.125"	.334"/.354"	W-03
N-04	—	.781"-32	1.375"	.365"/.385"	W-04
N-05	—	.969"-32	1.563"	.396"/.416"	W-05
N-06	—	1.173"-18	1.750"	.396"/.416"	W-06
N-065	TN-065	1.312"-18	2.063"	.428"/.448"	WH-065
N-07	TN-07	1.376"-18	2.063"	.428"/.448"	W-07
N-08	TN-08	1.563"-18	2.250"	.428"/.448"	W-08
N-09	TN-09	1.767"-18	2.531"	.428"/.448"	W-09
N-10	TN-10	1.967"-18	2.688"	.490"/.510"	W-10
N-11	TN-11	2.157"-18	2.969"	.490"/.510"	W-11
N-12	TN-12	2.360"-18	3.156"	.521"/.541"	W-12
N-13	TN-13	2.548"-18	3.375"	.553"/.573"	W-13
N-14	TN-14	2.751"-18	3.625"	.553"/.573"	W-14
AN-15	TAN-15	2.933"-12	3.875"	.584"/.604"	W-15
AN-16	TAN-16	3.137"-12	4.156"	.584"/.604"	W-16
AN-17	TAN-17	3.340"-12	4.406"	.615"/.635"	W-17
AN-18	TAN-18	3.527"-12	4.656"	.678"/.698"	W-18
AN-19	TAN-19	3.730"-12	4.937"	.709"/.729"	W-19
AN-20	TAN-20	3.918"-12	5.187"	.735"/.760"	W-20
AN-21	TAN-21	4.122"-12	5.437"	.735"/.760"	W-21
AN-22	TAN-22	4.325"-12	5.718"	.766"/.791"	W-22
AN-24	TAN-24	4.716"-12	6.125"	.798"/.823"	W-24
AN-26	TAN-26	5.106"-12	6.750"	.860"/.885"	W-26
AN-28	TAN-128	5.497"-12	7.093"	.923"/.948"	W-28
AN-30	TAN-130	5.888"-12	7.687"	.954"/.979"	W-30
AN-32	TAN-132	6.284"-8	8.062"	1.016"/1.041"	W-32
AN-34	TAN-134	6.659"-8	8.656"	1.048"/1.073"	W-34
AN-36	TAN-136	7.066"-8	9.062"	1.079"/1.104"	W-36
AN-38	TAN-138	7.472"-8	9.468"	1.110"/1.135"	W-38
AN-40	TAN-140	7.847"-8	9.843"	1.173"/1.198"	W-40
N-44	—	8.628"-8	11.000"	1.230"/1.260"	W-44



Need a Material Certification or Certificate of Compliance? Visit www.huyett.com to download free certifications from your Account Order History.

www.huyett.com/MyAccount/OrderHistory

HEAVY DUTY

Carbon Steel • Plain

Part No.	Cross Reference†	Thread Size & Pitch	O.D.	Thickness Min/Max	Mating Lock Washer
NH-08	NHE-08	1.563"-18	2.250"	.552"/.572"	WH-08
NH-09	NHE-09	1.767"-18	2.531"	.552"/.572"	WH-09
NH-10	NHE-10	1.967"-18	2.688"	.615"/.635"	WH-10
NH-11	NHE-11	2.157"-18	2.969"	.615"/.635"	WH-11
NH-12	NHE-12	2.360"-18	3.156"	.646"/.666"	WH-12
NH-13	NHE-13	2.548"-18	3.750"	.708"/.728"	WH-13
NH-14	NHE-14	2.751"-18	3.625"	.708"/.728"	WH-14
NH-15	NHE-15	2.933"-12	3.875"	.740"/.760"	WH-15
NH-16	NHE-16	3.137"-12	4.156"	.740"/.760"	WH-16
NH-17	NHE-17	3.340"-12	4.406"	.771"/.791"	WH-17
NH-18	NHE-18	3.527"-12	4.656"	.865"/.885"	WH-18
NH-19	NHE-19	3.730"-12	4.938"	.896"/.916"	WH-19
NH-20	NHE-20	3.918"-12	5.188"	.927"/.947"	WH-20
NH-21	NHE-21	4.122"-12	5.438"	.927"/.947"	WH-21
NH-22	NHE-22	4.325"-12	5.719"	.958"/.978"	WH-22
NH-24	NHE-24	4.716"-12	6.125"	1.021"/1.041"	WH-24
NH-26	NHE-26	5.106"-12	6.750"	1.083"/1.103"	WH-26
NH-28	NHE-28	5.497"-12	7.094"	1.177"/1.197"	WH-28
NH-30	NHE-30	5.888"-12	7.688"	1.240"/1.260"	WH-30
NH-32	NHE-32	6.284"-8	8.063"	1.271"/1.291"	WH-32
NH-34	NHE-34	6.659"-8	8.656"	1.333"/1.353"	WH-34
NH-36	NHE-36	7.066"-8	9.063"	1.396"/1.416"	WH-36
NH-38	NHE-38	7.472"-8	9.469"	1.396"/1.416"	WH-38
NH-40	NHE-40	7.847"-8	9.844"	1.490"/1.510"	WH-40

FINE THREADS

Carbon Steel • Plain

Part No.	Cross Reference†	Thread Size & Pitch	O.D.	Thickness Min/Max	Mating Lock Washer
NI-01	NIN-01	.750"-16	1.500"	.365"/.385"	WI-01
NI-02	NIN-02	.875"-16	1.625"	.365"/.385"	WI-02
NI-03	NIN-03	1.000"-16	1.750"	.365"/.385"	WI-03
NI-04	NIN-04	1.125"-16	1.875"	.365"/.385"	WI-04
NI-05	NIN-05	1.250"-16	2.000"	.490"/.510"	WI-05
NI-06	NIN-06	1.375"-16	2.250"	.490"/.510"	WI-06
NI-07	NIN-07	1.500"-16	2.250"	.490"/.510"	WI-07
NI-08	NIN-08	1.625"-16	2.500"	.490"/.510"	WI-08
NI-09	NIN-09	1.750"-16	2.625"	.490"/.510"	WI-09
NI-10	NIN-10	1.875"-16	2.750"	.490"/.510"	WI-10
NI-11	NIN-11	2.000"-16	3.000"	.490"/.510"	WI-11
NI-12	NIN-12	2.250"-16	3.250"	.615"/.635"	WI-12
NI-13	NIN-13	2.500"-16	3.500"	.615"/.635"	WI-13
NI-14	NIN-14	2.750"-16	3.750"	.615"/.635"	WI-14

For additional information including nominal bearing bore and face diameter, visit huyett.com.

† ANSI/ABMA 8.2

3

‡ Standard Locknut LLC



sales@huyett.com • 785-392-3017 • www.huyett.com



BEARING LOCK NUTS • INCH

LEFT-HANDED THREADS

Carbon Steel • Plain

Part No.	Thread Size & Pitch	O.D.	Thickness Min/Max	Mating Lock Washer
NL-00	.391"-32	.750"	.209"/.229"	W-00
NL-01	.469"-32	.875"	.303"/.323"	W-01
NL-02	.586"-32	1"	.303"/.323"	W-02
NL-03	.664"-32	1.125"	.334"/.354"	W-03
NL-04	.781"-32	1.375"	.365"/.385"	W-04
NL-05	.969"-32	1.563"	.396"/.416"	W-05
NL-06	1.173"-18	1.750"	.396"/.416"	W-06
NL-07	1.376"-18	2.630"	.428"/.448"	W-07
NL-08	1.563"-18	2.250"	.428"/.448"	W-08
NL-09	1.767"-18	2.531"	.428"/.448"	W-09
NL-10	1.967"-18	2.688"	.490"/.510"	W-10
NL-11	2.157"-18	2.969"	.490"/.510"	W-11
NL-12	2.360"-18	3.156"	.521"/.541"	W-12
NL-13	2.548"-18	3.375"	.553"/.573"	W-13
NL-14	2.751"-18	3.625"	.553"/.573"	W-14
NL-15	2.933"-12	3.875"	.584"/.604"	W-15
NL-16	3.137"-12	4.156"	.584"/.604"	W-16
NL-17	3.340"-12	4.406"	.615"/.635"	W-17
NL-18	3.527"-12	4.656"	.678"/.698"	W-18
NL-19	3.730"-12	4.938"	.709"/.729"	W-19
NL-20	3.918"-12	5.188"	.735"/.760"	W-20
NL-21	4.122"-12	5.438"	.735"/.760"	W-21
NL-22	4.325"-12	5.719"	.766"/.791"	W-22
NL-24	4.716"-12	6.125"	.798"/.823"	W-24
NL-26	5.106"-12	6.750"	.860"/.885"	W-26
NL-28	5.497"-12	7.094"	.923"/.948"	W-28
NL-30	5.888"-12	4.688"	.954"/.979"	W-30
NL-32	6.284"-8	8.063"	1.016"/1.041"	W-32
NL-34	6.659"-8	8.656"	1.048"/1.073"	W-34
NL-36	7.066"-8	9.063"	1.079"/1.104"	W-36
NL-38	7.472"-8	9.469"	1.110"/1.135"	W-38
NL-40	7.847"-8	9.844"	1.173"/1.198"	W-40

STAINLESS STEEL

303 Stainless Steel • Plain • Passivated

Part No.	Thread Size & Pitch	O.D.	Thickness Min/Max	Mating Lock Washer
NS-00	.391"-32	.750"	.209"/.229"	WS-00
NS-01	.469"-32	.875"	.303"/.323"	WS-01
NS-02	.586"-32	1"	.303"/.323"	WS-02
NS-03	.664"-32	1.125"	.334"/.354"	WS-03
NS-04	.781"-32	1.375"	.365"/.385"	WS-04
NS-05	.969"-32	1.563"	.396"/.416"	WS-05
NS-06	1.173"-18	1.750"	.396"/.416"	WS-06
NS-07	1.376"-18	2.063"	.428"/.448"	WS-07
NS-08	1.563"-18	2.250"	.428"/.448"	WS-08
NS-09	1.767"-18	2.531"	.428"/.448"	WS-09
NS-10	1.967"-18	2.688"	.490"/.510"	WS-10
NS-11	2.157"-18	2.969"	.490"/.510"	WS-11
NS-12	2.360"-18	3.156"	.521"/.541"	WS-12
NS-13	2.548"-18	3.375"	.553"/.573"	WS-13
NS-14	2.751"-18	3.625"	.553"/.573"	WS-14
NS-15	2.933"-12	3.875"	.584"/.604"	WS-15
NS-16	3.137"-12	4.156"	.584"/.604"	WS-16
NS-17	3.340"-12	4.406"	.615"/.635"	WS-17
NS-18	3.527"-12	4.656"	.678"/.698"	WS-18
NS-19	3.730"-12	4.938"	.709"/.729"	WS-19
NS-20	3.918"-12	5.188"	.735"/.760"	WS-20
NS-21	4.122"-12	5.438"	.735"/.760"	WS-21
NS-22	4.325"-12	5.719"	.766"/.791"	WS-22
NS-24	4.716"-12	6.125"	.798"/.823"	WS-24
NS-26	5.106"-12	6.750"	.860"/.885"	WS-26
NS-28	5.497"-12	7.094"	.923"/.948"	WS-28
NS-30	5.888"-12	7.688"	.954"/.979"	WS-30
NS-32	6.284"-8	8.063"	1.016"/1.041"	WS-32
NS-34	6.659"-8	8.656"	1.048"/1.073"	WS-34
NS-36	7.066"-8	9.063"	1.079"/1.104"	WS-36
NS-38	7.472"-8	9.469"	1.110"/1.135"	WS-38
NS-40	7.847"-8	9.844"	1.173"/1.198"	WS-40

RoHS – RESTRICTION OF HAZARDOUS SUBSTANCES



G.L. Huyett's plain carbon steel and stainless steel parts are RoHS compliant.

European Union legislation restricting the use of hazardous substances in electrical and electronic equipment (RoHS Directive 2002/95/EC) and promoting the collection and recycling of this equipment (WEEE Directive 2002/96/EC) has been in force since February 2003. The legislation provides for the creation of collection schemes where consumers return their used e-waste free of charge. The objective of these schemes is to increase the recycling and/or re-use of these products. It also requires heavy metals such as lead, mercury, cadmium, and hexavalent chromium and flame retardants such as polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) to be substituted by safer alternatives.

Inadequately treated e-waste poses environmental and health risks. In December 2008, the European Commission therefore proposed to revise the directives on electrical and electronic equipment in order to tackle the fast increasing waste stream of these products. The aim is to increase the amount of e-waste that is appropriately treated and to reduce the volume that goes to disposal. The aim of the RoHS recast was also to reduce administrative burdens and ensure coherency with newer policies and legislation covering, for example, chemicals and the new legislative framework for the marketing of products in the European Union. The RoHS Recast Directive was published in the Official Journal on July 1, 2011.





LOCK WASHERS • INCH

SAE ABEC / SAE AFBMA

Carbon Steel • Plain

Part No.	Free Outside Diameter	I.D. Min/Max	Thickness Min/Max	Tangs	Mating Lock Nut
W-00	.875"	.406"/.421"	.038"/.046"	9	N-00
W-01	1.015"	.484"/.499"	.038"/.046"	9	N-01
W-02	1.156"	.601"/.616"	.038"/.046"	11	N-02
W-03	1.328"	.679"/.694"	.038"/.046"	11	N-03
W-04	1.531"	.801"/.816"	.038"/.046"	11	N-04
W-05	1.718"	.989"/1.009"	.046"/.054"	13	N-05
W-06	1.921"	1.193"/1.213"	.046"/.054"	13	N-06
W-07	2.25"	1.396"/1.416"	.046"/.054"	15	N-07
W-08	2.468"	1.583"/1.603"	.053"/.063"	15	N-08
W-09	2.734"	1.792"/1.817"	.053"/.063"	17	N-09
W-10	2.921"	1.992"/2.017"	.053"/.063"	17	N-10
W-11	3.109"	2.182"/2.207"	.058"/.068"	17	N-11
W-12	3.343"	2.400"/2.425"	.058"/.068"	17	N-12
W-13	3.578"	2.588"/2.613"	.058"/.068"	19	N-13
W-14	3.828"	2.791"/2.816"	.058"/.068"	19	N-14
W-15	4.109"	2.973"/3.003"	.067"/.077"	19	AN-15
W-16	4.375"	3.177"/3.207"	.067"/.077"	19	AN-16
W-17	4.625"	3.395"/3.425"	.067"/.077"	19	AN-17
W-18	4.937"	3.582"/3.612"	.088"/.100"	19	AN-18
W-19	5.218"	3.800"/3.830"	.088"/.100"	19	AN-19
W-20	5.5"	3.988"/4.018"	.088"/.100"	19	AN-20
W-21	5.703"	4.192"/4.222"	.088"/.100"	19	AN-21
W-22	6.062"	4.395"/4.425"	.118"/.132"	19	AN-22
W-24	6.468"	4.801"/4.831"	.118"/.132"	19	AN-24
W-26	7.031"	5.191"/5.226"	.118"/.132"	19	AN-26
W-28	7.437"	5.582"/5.617"	.118"/.132"	19	AN-28
W-30	8.062"	5.983"/6.018"	.148"/.164"	19	AN-30
W-32	8.437"	6.389"/6.424"	.148"/.164"	19	AN-32
W-34	9.062"	6.764"/6.799"	.148"/.164"	19	AN-34
W-36	9.437"	7.171"/7.206"	.148"/.164"	19	AN-36
W-38	9.875"	7.577"/7.612"	.148"/.164"	19	AN-38
W-40	10.312"	7.982"/8.017"	.148"/.164"	19	AN-40
W-44	11.437"	8.701"/8.736"	.148"/.164"	19	N-44

HEAVY DUTY

Carbon Steel • Plain

Part No.	Cross Reference*	Free Outside Diameter	I.D. Min/Max	Thickness Min/Max	Tangs	Mating Lock Nut
WH-00	TW-100	0.89"	.828"/.891"	.038"/.046"	9	NH-00
WH-01	TW-101	1.031"	.969"/1.031"	.038"/.046"	9	NH-01
WH-02	TW-102	1.156"	1.094"/1.156"	.053"/.063"	11	NH-02
WH-03	TW-103	1.343"	1.281"/1.344"	.053"/.063"	11	NH-03
WH-04	TW-104	1.562"	1.500"/1.563"	.053"/.063"	11	NH-04
WH-05	TW-105	1.703"	1.641"/1.703"	.057"/.067"	13	NH-05
WH-06	TW-106	1.953"	1.891"/1.953"	.057"/.067"	13	NH-06
WH-065	TW-1065	2.234"	2.172"/2.234"	.057"/.067"	15	NH-065
WH-07	TW-107	2.25"	2.188"/2.250"	.057"/.067"	15	NH-07
WH-08	TW-108	2.484"	2.422"/2.484"	.067"/.077"	15	NH-08
WH-09	TW-109	2.718"	2.656"/2.719"	.067"/.077"	17	NH-09
WH-10	TW-110	2.921"	2.859"/2.922"	.067"/.077"	17	NH-10
WH-11	TW-111	3.093"	3.031"/3.094"	.067"/.077"	17	NH-11
WH-12	TW-112	3.328"	3.266"/3.328"	.077"/.087"	17	NH-12
WH-13	TW-113	3.562"	3.500"/3.563"	.077"/.087"	19	NH-13
WH-14	TW-114	3.187"	3.750"/3.813"	.077"/.087"	19	NH-14
WH-15	TW-115	4.047"	3.984"/4.047"	.089"/.101"	19	NH-15
WH-16	TW-116	4.39"	4.328"/4.391"	.089"/.101"	19	NH-16
WH-17	TW-117	4.625"	4.563"/4.625"	.089"/.101"	19	NH-17
WH-18	TW-118	4.953"	4.891"/4.953"	.118"/.132"	19	NH-18
WH-19	TW-119	5.234"	5.172"/5.234"	.118"/.132"	19	NH-19
WH-20	TW-120	5.484"	5.422"/5.484"	.118"/.132"	19	NH-20
WH-21	TW-121	5.703"	5.641"/5.703"	.118"/.132"	19	NH-21
WH-22	TW-122	6"	5.938"/6.000"	.133"/.147"	19	NH-22
WH-24	TW-124	6.531"	6.469"/6.531"	.157"/.173"	19	NH-24
WH-26	TW-126	7.047"	6.984"/7.047"	.157"/.173"	19	NH-26
WH-28	TW-128	7.437"	7.375"/7.438"	.157"/.173"	19	NH-28
WH-30	TW-130	8.062"	8.000"/8.063"	.194"/.212"	19	NH-30
WH-32	TW-132	8.453"	8.391"/8.453"	.194"/.212"	19	NH-32
WH-34	TW-134	9.078"	9.016"/9.078"	.194"/.212"	19	NH-34
WH-36	TW-136	9.437"	9.375"/9.438"	.194"/.212"	19	NH-36
WH-38	TW-138	9.851"	9.797"/9.859"	.194"/.212"	19	NH-38
WH-40	TW-140	10.406"	10.344"/10.406"	.194"/.212"	19	NH-40

For additional information including nominal bearing bore and face diameter, visit huyett.com.

OTHER TYPES AND STYLES AVAILABLE • CALL FOR DETAILS!



**LIGHTWEIGHT
HARDENED ALLOY STEEL
HIGH-PRECISION**



**HIGH-PRECISION • SELF-LOCKING
AEROSPACE • MS172236-MS172270
MILITARY GRADE • MS19068**



LOCK WASHERS • INCH

FINE THREAD

Carbon Steel • Plain

Part No.	Free Outside Diameter	I.D. Min/Max	Thickness Min/Max	Tangs	Mating Lock Nut
WI-01	1.563"	.797"/.828"	.046"/.054"	9	NI-01
WI-02	1.688"	.922"/.953"	.046"/.054"	9	NI-02
WI-03	1.813"	1.047"/1.078"	.046"/.054"	11	NI-03
WI-04	2"	1.172"/1.203"	.046"/.054"	11	NI-04
WI-05	2.125"	1.297"/1.328"	.046"/.054"	11	NI-05
WI-06	2.375"	1.422"/1.453"	.046"/.054"	13	NI-06
WI-07	2.375"	1.547"/1.578"	.046"/.054"	13	NI-07
WI-08	2.625"	1.672"/1.703"	.058"/.068"	13	NI-08
WI-09	2.75"	1.797"/1.828"	.058"/.068"	15	NI-09
WI-10	2.875"	1.922"/1.953"	.058"/.068"	15	NI-10
WI-11	3.125"	2.047"/2.078"	.058"/.068"	15	NI-11
WI-12	3.438"	2.297"/2.328"	.058"/.068"	17	NI-12
WI-13	3.688"	2.547"/2.578"	.058"/.068"	17	NI-13
WI-14	3.938"	2.797"/2.828"	.058"/.068"	17	NI-14

THIN SECTION

Carbon Steel • Plain

Part No.	Free Outside Diameter	I.D. Min/Max	Thickness Min/Max	Tangs	Mating Lock Nut
WT-00	0.828"	.406"/.421"	.036"/.044"	9	NT-00
WT-01	0.921"	.484"/.499"	.036"/.044"	9	NT-01
WT-02	1.093"	.601"/.616"	.036"/.044"	11	NT-02
WT-03	1.203"	.679"/.694"	.036"/.044"	11	NT-03
WT-04	1.375"	.801"/.816"	.036"/.044"	11	NT-04
WT-05	1.562"	.989"/1.009"	.046"/.054"	13	NT-05
WT-06	1.851"	1.193"/1.213"	.046"/.054"	13	NT-06
WT-07	2.078"	1.396"/1.416"	.046"/.054"	15	NT-07
WT-08	2.25"	1.583"/1.603"	.058"/.068"	15	NT-08
WT-09	2.5"	1.792"/1.817"	.058"/.068"	17	NT-09
WT-10	2.687"	1.992"/2.017"	.058"/.068"	17	NT-10
WT-11	2.953"	2.182"/2.207"	.058"/.068"	17	NT-11
WT-12	3.187"	2.400"/2.425"	.058"/.068"	17	NT-12
WT-13	3.375"	2.588"/2.613"	.058"/.068"	19	NT-13
WT-14	3.593"	2.791"/2.816"	.058"/.068"	19	NT-14
WT-15	3.921"	2.973"/3.003"	.058"/.068"	19	NT-15
WT-16	4.14"	3.177"/3.207"	.058"/.068"	19	NT-16
WT-17	4.359"	3.395"/3.425"	.058"/.068"	19	NT-17
WT-18	4.546"	3.582"/3.612"	.058"/.068"	19	NT-18

STAINLESS STEEL

302/304 Stainless Steel • Passivated

Part No.	Free Outside Diameter	I.D. Min/Max	Thickness Min/Max	Tangs	Mating Lock Nut
WS-00	0.875"	.406"/.421"	.038"/.046"	9	NS-00
WS-01	1.015"	.484"/.499"	.038"/.046"	9	NS-01
WS-02	1.156"	.601"/.616"	.038"/.046"	11	NS-02
WS-03	1.328"	.679"/.694"	.038"/.046"	11	NS-03
WS-04	1.531"	.801"/.816"	.038"/.046"	11	NS-04
WS-05	1.718"	.989"/1.009"	.046"/.054"	13	NS-05
WS-06	1.921"	1.193"/1.213"	.046"/.054"	13	NS-06
WS-07	2.25"	1.396"/1.416"	.046"/.054"	15	NS-07
WS-08	2.468"	1.583"/1.603"	.053"/.063"	15	NS-08
WS-09	2.734"	1.792"/1.817"	.053"/.063"	17	NS-09
WS-10	2.921"	1.992"/2.017"	.053"/.063"	17	NS-10
WS-11	3.109"	2.182"/2.207"	.058"/.068"	17	NS-11
WS-12	3.343"	2.400"/2.425"	.058"/.068"	17	NS-12
WS-13	3.578"	2.588"/2.613"	.058"/.068"	19	NS-13
WS-14	3.828"	2.791"/2.816"	.058"/.068"	19	NS-14
WS-15	4.109"	2.973"/3.003"	.067"/.077"	19	NS-15
WS-16	4.375"	3.177"/3.207"	.067"/.077"	19	NS-16
WS-17	4.625"	3.395"/3.425"	.067"/.077"	19	NS-17
WS-18	4.937"	3.582"/3.612"	.088"/.100"	19	NS-18
WS-19	5.218"	3.800"/3.830"	.088"/.100"	19	NS-19
WS-20	5.5"	3.988"/4.018"	.088"/.100"	19	NS-20
WS-21	5.703"	4.192"/4.222"	.088"/.100"	19	NS-21
WS-22	6.062"	4.395"/4.425"	.118"/.132"	19	NS-22
WS-24	6.468"	4.801"/4.831"	.118"/.132"	19	NS-24
WS-26	7.031"	5.191"/5.226"	.118"/.132"	19	NS-26
WS-28	7.437"	5.582"/5.617"	.118"/.132"	19	NS-28
WS-30	8.062"	5.983"/6.018"	.148"/.164"	19	NS-30
WS-32	8.437"	6.389"/6.424"	.148"/.164"	19	NS-32
WS-34	9.062"	6.764"/6.799"	.148"/.164"	19	NS-34



Need a Material Certification or Certificate of Compliance? Visit www.huyett.com to download free certifications from your Account Order History.

www.huyett.com/MyAccount/OrderHistory

For additional information including nominal bearing bore and face diameter, visit huyett.com.





METRIC

BEARING LOCK NUTS

ISO-2982

Carbon Steel • Plain

Part No.	Thread Size & Pitch	O.D.	Thickness Min/Max	Mating Lock Washer
KM-00	M10 × 0.75	M18	M4	MB-00
KM-01	M12 × 1	M22	M4	MB-01
KM-02	M15 × 1	M25	M5	MB-02
KM-03	M17 × 1	M28	M5	MB-03
KM-04	M20 × 1	M32	M6	MB-04
KM-044	M22 × 1	M34	M6	MB-044
KM-05	M25 × 1.5	M38	M7	MB-05
KM-056	M28 × 1.5	M42	M7	MB-056
KM-06	M30 × 1.5	M45	M7	MB-06
KM-064	M32 × 1.5	M48	M8	MB-064
KM-07	M35 × 1.5	M52	M8	MB-07
KM-08	M40 × 1.5	M58	M9	MB-08
KM-09	M45 × 1.5	M65	M10	MB-09
KM-10	M50 × 1.5	M70	M11	MB-10
KM-11	M55 × 2	M75	M11	MB-11
KM-12	M60 × 2	M80	M11	MB-12
KM-13	M65 × 2	M85	M12	MB-13
KM-14	M70 × 2	M92	M12	MB-14
KM-15	M75 × 2	M98	M13	MB-15
KM-16	M80 × 2	M105	M15	MB-16
KM-17	M85 × 2	M110	M16	MB-17
KM-18	M90 × 2	M120	M16	MB-18
KM-19	M95 × 2	M125	M17	MB-19
KM-20	M100 × 2	M130	M18	MB-20
KM-21	M105 × 2	M140	M18	MB-21
KM-22	M110 × 2	M145	M19	MB-22
KM-23	M115 × 2	M150	M19	MB-23
KM-24	M120 × 2	M155	M20	MB-24
KM-25	M125 × 2	M160	M21	MB-25
KM-26	M130 × 2	M165	M21	MB-26
KM-27	M135 × 2	M175	M22	MB-27
KM-28	M140 × 2	M180	M22	MB-28
KM-29	M145 × 2	M190	M24	MB-29
KM-30	M150 × 2	M195	M24	MB-30
KM-31	M155 × 3	M200	M25	MB-31
KM-32	M160 × 3	M210	M25	MB-32
KM-33	M165 × 3	M210	M26	MB-33
KM-34	M170 × 3	M220	M26	MB-34
KM-36	M180 × 3	M230	M27	MB-36
KM-38	M190 × 3	M240	M28	MB-38
KM-40	M200 × 3	M250	M29	MB-40
KM-44	M220 × 4	M280	M32	—
KM-48	M240 × 4	M300	M34	—

LOCK WASHERS

ISO-2982

Carbon Steel • Plain


Part No.	Free Outside Diameter	I.D.	Thickness	Tangs	Mating Lock Nut
MB-00	M21	M10	M1	9	KM-00
MB-01	M25	M12	M1	11	KM-01
MB-02	M28	M15	M1	11	KM-02
MB-03	M32	M17	M1	11	KM-03
MB-04	M36	M20	M1	11	KM-04
MB-044	M38	M22	M1	11	KM-044
MB-05	M42	M25	M1.25	13	KM-05
MB-056	M46	M28	M1.25	13	KM-056
MB-06	M49	M30	M1.25	13	KM-06
MB-064	M52	M32	M1.25	13	KM-064
MB-07	M57	M35	M1.25	13	KM-07
MB-08	M62	M40	M1.25	13	KM-08
MB-09	M69	M45	M1.25	13	KM-09
MB-10	M74	M50	M1.25	13	KM-10
MB-11	M81	M55	M1.5	17	KM-11
MB-12	M86	M60	M1.5	17	KM-12
MB-13	M92	M65	M1.5	17	KM-13
MB-14	M98	M70	M1.5	17	KM-14
MB-15	M104	M75	M1.5	17	KM-15
MB-16	M112	M80	M1.8	17	KM-16
MB-17	M119	M85	M1.8	17	KM-17
MB-18	M126	M90	M1.8	17	KM-18
MB-19	M133	M95	M1.8	17	KM-19
MB-20	M142	M100	M1.8	17	KM-20
MB-21	M145	M105	M1.8	17	KM-21
MB-22	M154	M110	M1.8	17	KM-22
MB-23	M159	M115	M2	17	KM-23
MB-24	M164	M120	M2	17	KM-24
MB-25	M170	M125	M2	17	KM-25
MB-26	M175	M130	M2	17	KM-26
MB-27	M185	M135	M2	17	KM-27
MB-28	M192	M140	M2	17	KM-28
MB-29	M202	M145	M2	17	KM-29
MB-30	M205	M150	M2	17	KM-30
MB-31	M212	M155	M2.5	19	KM-31
MB-32	M217	M160	M2.5	19	KM-32
MB-33	M222	M165	M2.5	19	KM-33
MB-34	M232	M170	M2.5	19	KM-34
MB-36	M242	M180	M2.5	19	KM-36
MB-38	M252	M190	M2.5	19	KM-38
MB-40	M262	M200	M2.5	19	KM-40

For additional information including nominal bearing bore and face diameter, visit huyett.com.



CHOOSE FROM A BROAD SELECTION OF PARTS AND COMPONENTS

Key Stock	Hoses
Machine Keys	Couplers
Woodruff Keys	Wave Springs
Shafting	Wave Washers
Keyed Shafting	Bushings
Shaft Collars	Washers
Flats & Squares	O-Rings
Retaining Rings	Shims
Clips	Lifting Eye Bolts
Spiral Rings	Lifting Eye Nuts
Wire Rings	Hoist Rings
Disc Springs	Turnbuckles
Clevis Pins	Rod Ends
Lynch Pins	Shackles
Bridge Pins	Hooks
Cotter Pins	Yoke Ends
Hitch Pins	Wire Rope
Dowel Pins	Chain Hardware
Grooved Pins	Tool Steel
Snap Pins	Shim Stock
Grease Fittings	Installation Tools
Grease Guns	Assortments

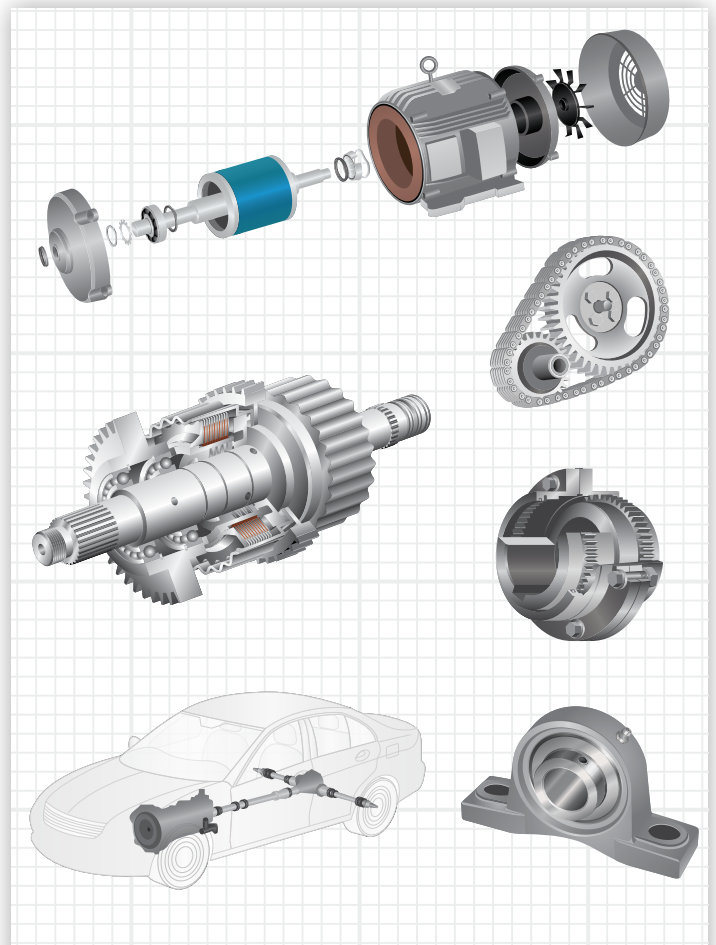

**VISIT HUYETT.COM FOR
LOW MINIMUMS, GREAT PRICES,
& EASY ORDERING!**

**BROAD
SELECTION**

**HIGH
QUALITY**

**COMPETITIVE
PRICES**

© 2020 G.L. Huyett, Revision 05/20



sales@huyett.com • 785-392-3017 • www.huyett.com